


# VVC6 MULTI-AXIS MASTER SWITCH

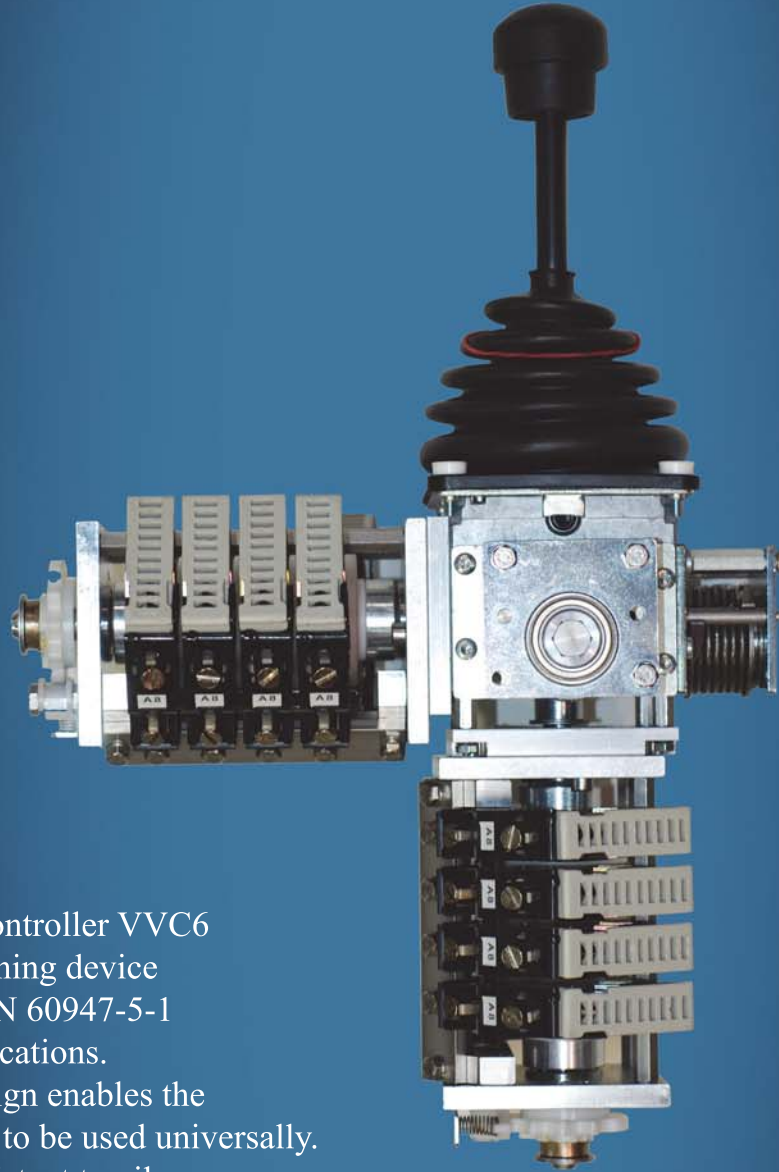

The multi-axis controller VVC6 is a rugged switching device according IEC/EN 60947-5-1 for hoisting applications. The modular design enables the switching device to be used universally. The VVC6 is resistant to oil, maritime climate, ozone and UV radiation.

Mechanical life	20 million (operating cycles)
Permissible ambient temperature	Operation -40° C to +60° C
	Storage -50° C to +80° C

Contact complement 8 A 250 V DC 13

Available with up to 6 detented steps in each direction 6 - 0 - 6

**SENETT CONTROLS**  
 **GESSMANN** GROUP  
Industrial Controllers

225 Admiral Blvd. Mississauga, On., L5T 2T3  
Tel: 905.564.0167 Email: [sales@senett.ca](mailto:sales@senett.ca)  
Fax: 905.564.6633 Website: [www.senett.ca](http://www.senett.ca)